PF04J181



Fig.2


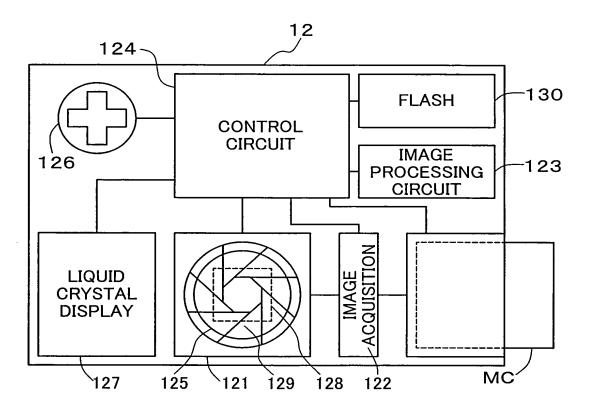


Fig.3

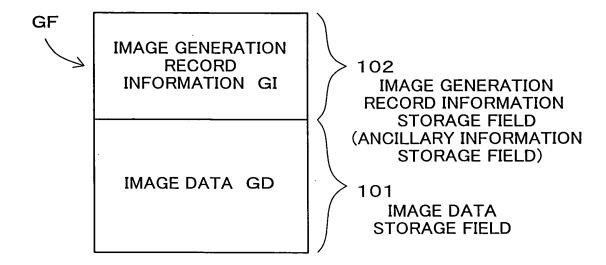

PF04J181



Fig.4

APP0		
APP1		
	IFD0	
		PM
		Exif
		MakerNote
		PM
		GPS
•	7504	
	IFD1	
APP6		
ALLO		
	PM	
		•

• 103



Fig.5

Tag name	Parameter value
Flash	 auto flash mode flash on reflected light sensor present reflected light sensed
Subject distance	1 (m)
Flash intensity	1000(BCPS)
Aperture value	F8
ISO speed rating	100

•

•

•



Fig.6

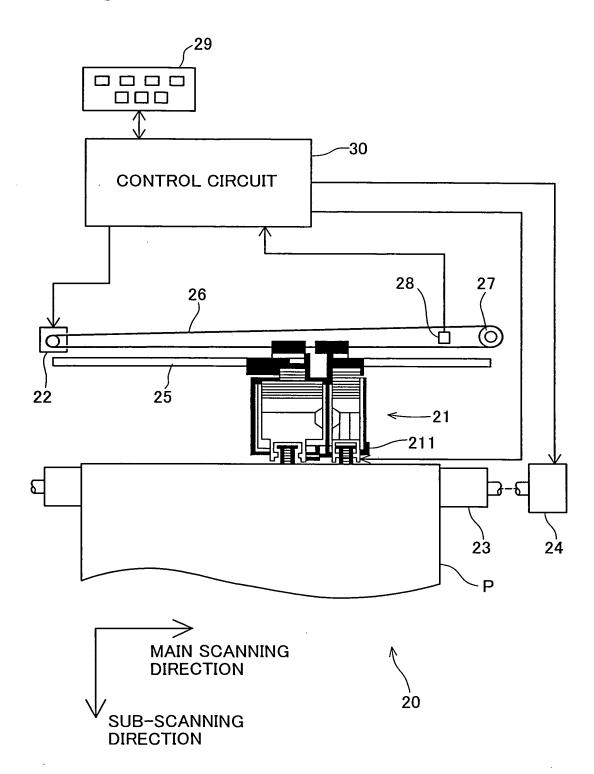




Fig.7


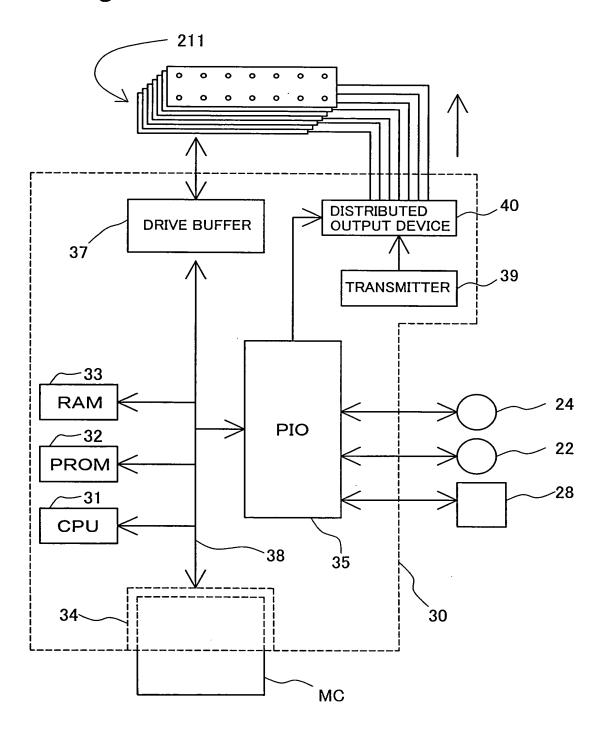





Fig.8

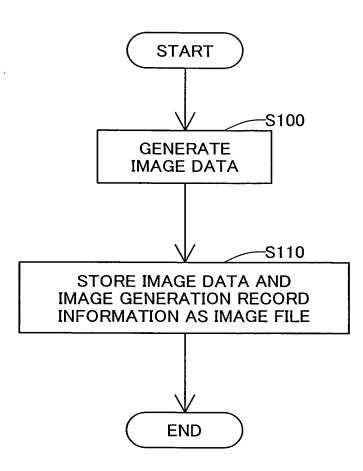

PF04J181



Fig.9

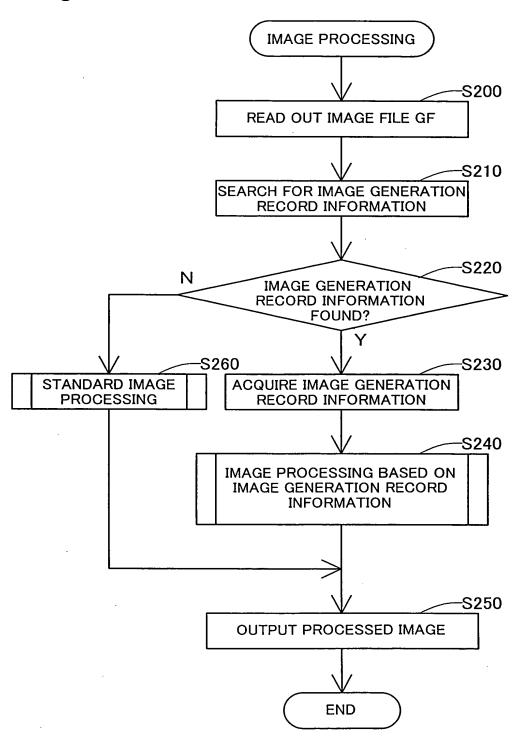

PF04J181

Fig.10

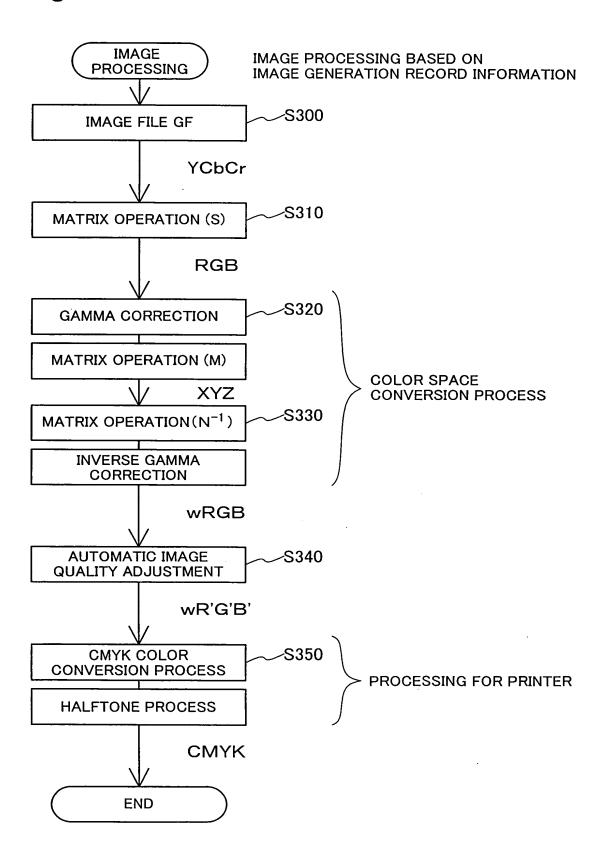




Fig.11

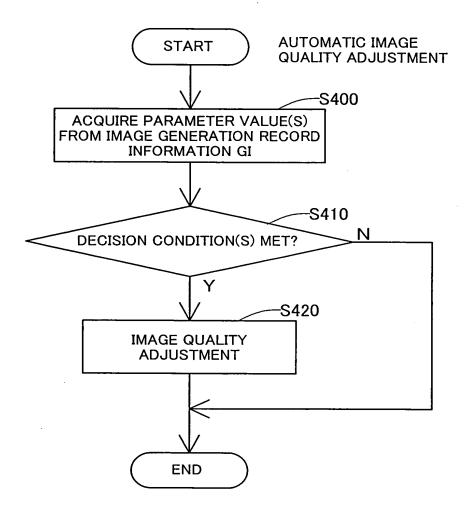
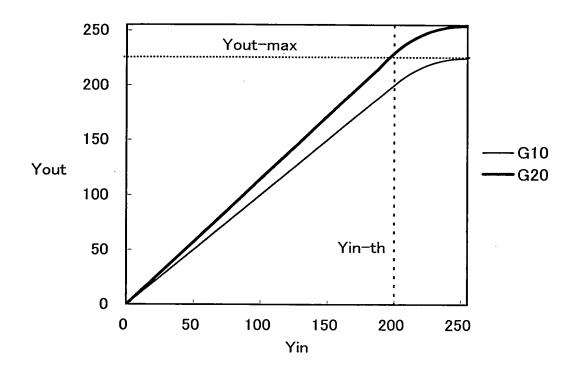




Fig.12





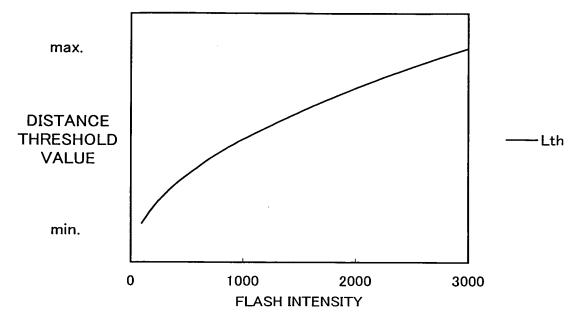


Fig.14

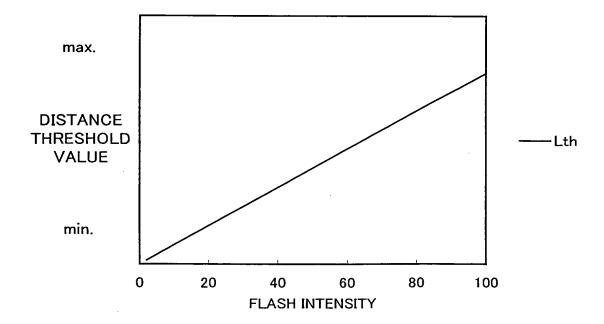




Fig.15

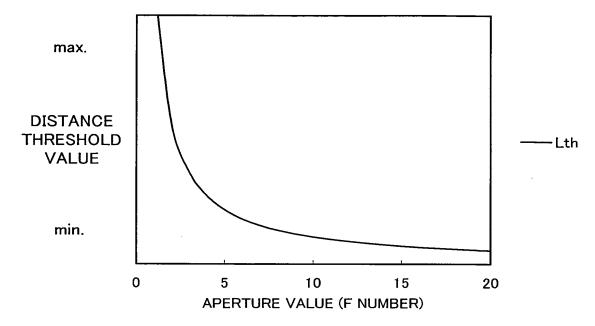


Fig.16

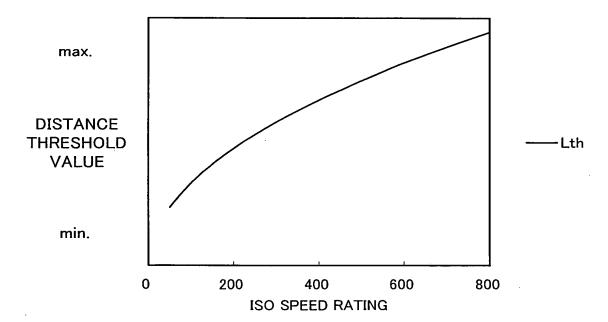




Fig.17

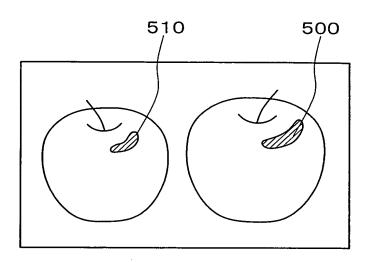


Fig.18

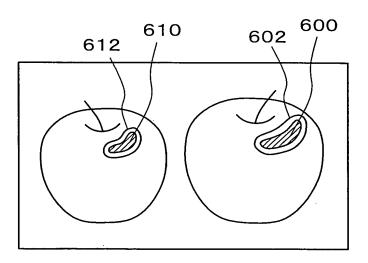




Fig.19



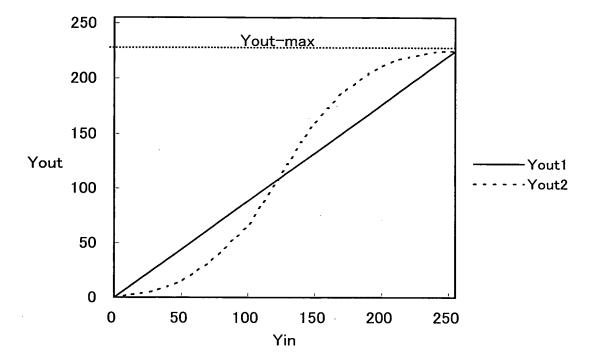




Fig.20

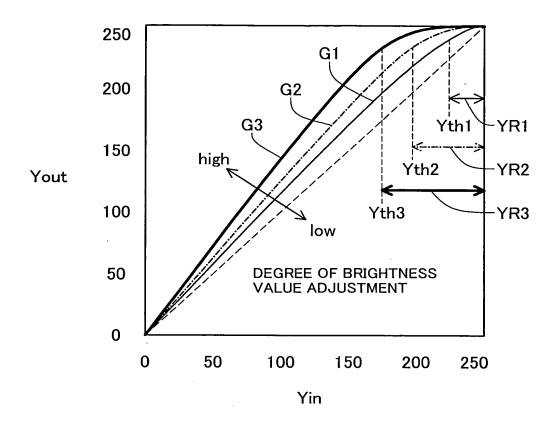

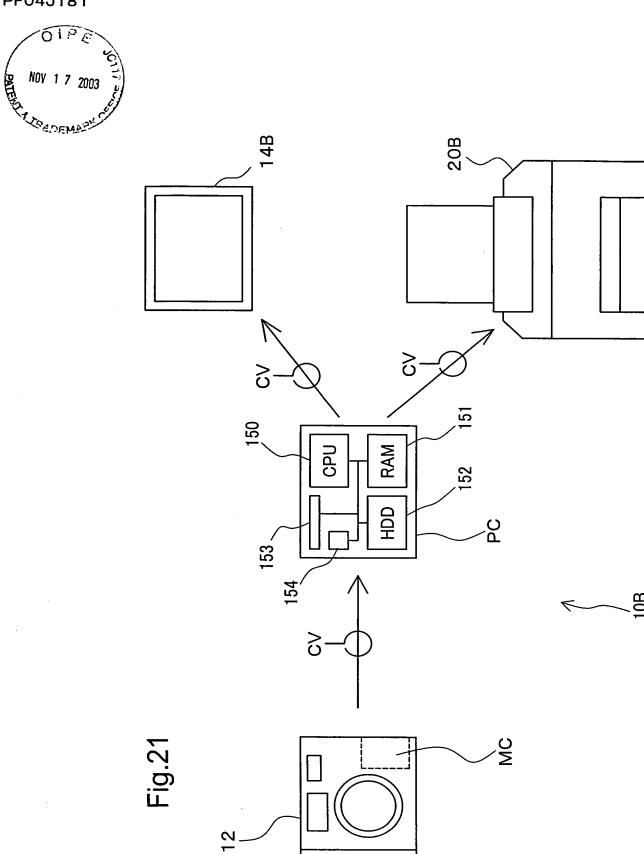

PF04J181



Fig.22

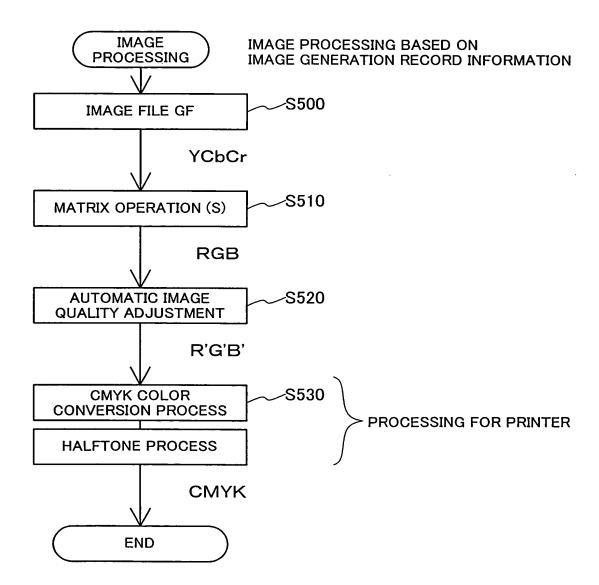




Fig.23

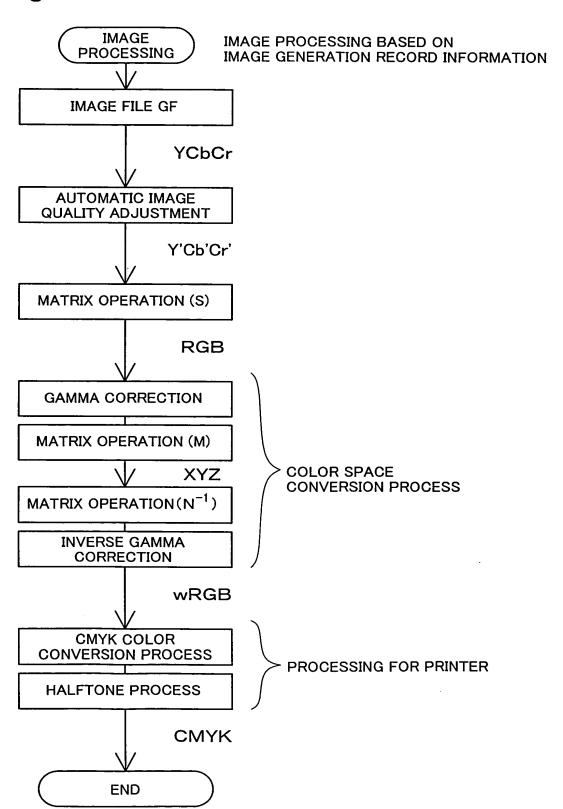




Fig.24

IMAGE PROCESSING BASED ON IMAGE GENERATION RECORD INFORMATION

